



Discrete Optimization

The multi-terminal maximum-flow network-interdiction problem

İbrahim Akgün^{a,*}, Barbaros Ç. Tansel^a, R. Kevin Wood^b^a Department of Industrial Engineering, Bilkent University, Bilkent 06800, Ankara, Turkey^b Operations Research Department, Naval Postgraduate School, Monterey, CA 93943, USA

ARTICLE INFO

Article history:

Received 23 May 2007

Accepted 19 December 2010

Available online 24 December 2010

Keywords:

OR in military

Integer programming

Network flows

Network interdiction

ABSTRACT

This paper defines and studies the multi-terminal maximum-flow network-interdiction problem (MTNIP) in which a *network user* attempts to maximize flow in a network among $K \geq 3$ pre-specified *node groups* while an *interdictor* uses limited resources to interdict network arcs to minimize this maximum flow. The paper proposes an exact (MTNIP-E) and an approximating model (MPNIM) to solve this NP-hard problem and presents computational results to compare the models. MTNIP-E is obtained by first formulating MTNIP as bi-level min-max program and then converting it into a mixed integer program where the flow is explicitly minimized. MPNIM is binary-integer program that does not minimize the flow directly. It partitions the node set into disjoint subsets such that each node group is in a different subset and minimizes the sum of the arc capacities crossing between different subsets. Computational results show that MPNIM can solve all instances in a few seconds while MTNIP-E cannot solve about one third of the problems in 24 hour. The optimal objective function values of both models are equal to each other for some problems while they differ from each other as much as 46.2% in the worst case. However, when the post-interdiction flow capacity incurred by the solution of MPNIM is computed and compared to the objective value of MTNIP-E, the largest difference is only 7.90% implying that MPNIM may be a very good approximation to MTNIP-E.

© 2010 Elsevier B.V. All rights reserved.

1. Introduction

This paper investigates what we call the *multi-terminal maximum-flow network-interdiction problem* (MTNIP) for which no previous work exists. In MTNIP, there are two opponents, a *network user/defender* and an *interdictor/attacker*. The network user wishes to maximize flow among $K \geq 3$ *node groups* in an undirected network while the interdictor tries to minimize the network user's maximum flow by using limited interdiction resources (e.g., aerial sorties, missiles) to destroy the arcs of the network.

Consider two hostile forces **AT** and **DF** where **AT** is the attacker/interdictor on a communication (transportation) network and **DF** is the defender/network user. **AT**'s interest is to minimize **DF**'s inter-force communication (transportation) capabilities by attacking a subset of **DF**'s communication (transportation) lines. The set of lines that can be attacked is limited by the availability of **AT**'s interdiction resources. Locations of **DF**'s forces may or may not be precisely known to **AT**. If they are precisely known, they are taken to be source and sink locations that mutually exchange information (materials). In the remaining case, we assume that **AT** has sufficient information to confine these locations to K node groups that are taken to be source and sink groups among which information (material) exchange takes place. **AT**'s problem is to identify a set of arcs whose deletion from the network limits **DF**'s ability to transfer flows (signals/materials) between exact or possible sources and sinks while **DF** aims to maximize flow through the intact part of the network. This problem can be modeled as a bi-level min-max problem where the inner maximization is a flow maximization problem given that a subset of arcs is interdicted while the outer minimization involves the minimization of the maximum objective value of the inner maximization over the set of binary vectors each satisfying the upper bound on the interdiction resource. Each binary vector specifies which arcs to be interdicted and which ones to be left intact. The resulting bi-level min-max problem is what we refer to as MTNIP. The mathematical formulation will be given in Section 2. MTNIP is a useful model to analyze possible courses of action to protect critical infrastructures against possible terrorist attacks. Such critical infrastructures may include telecommunication lines, power lines, subways, highways, energy delivery lines (e.g., natural gas, petroleum), and the like.

* Corresponding author. Tel.: +90 312 290 1262; fax: +90 312 266 4054.

E-mail address: iakgun@bilkent.edu.tr (İ. Akgün).

MTNIP is a generalization of the *maximum-flow network-interdiction problem* (MFNIP) (e.g., Wood, 1993). The problem context in MFNIP is the same as the one in MTNIP except that the interdictor tries to minimize the maximum flow from a source node s to a sink node t instead of among three or more groups of nodes. That is, MFNIP is a special case of MTNIP with $K = 2$. MFNIP is proven to be NP-hard even if a single unit of resource is required to interdict each arc (Wood, 1993) and hence MTNIP is also NP-hard. The goal of this paper is to extend the single-commodity structure of MFNIP to a multi-commodity structure so that more realistic and general problem settings can be handled.

Even though MTNIP is new to the literature, MFNIP is well-studied. The notable contributions are Wollmer (1964, 1970a), McMasters and Mustin (1970), Helmbold (1971), Ghare et al. (1971), Lubore et al. (1971), Wood (1993), Cormican et al. (1998), and Whiteman (1999). Almost all studies prior to Wood (1993) are specific to the application and are not extendible to more general contexts. Wood (1993) is the first to adopt mathematical programming methods. He develops a min-max formulation of MFNIP and then converts it to an integer-programming model. Cormican et al. (1998) study a stochastic variation of MFNIP. Whiteman (1999) adapts Wood (1993)'s model to select target sets.

Another category of network-interdiction problem is that of *maximizing the shortest path* (MXSP) in which a set of arcs is disabled to maximize the length of a shortest path between s and t through the usable portion of the network. Notable contributions are Fulkerson and Harding (1977), Golden (1978), Israeli (1999), and Israeli and Wood (2002).

Lim and Smith (2007) study a multi-commodity network-interdiction problem where the network user makes profit by delivering multiple commodities to certain destinations while the interdictor tries to minimize the network user's profit by destroying arcs. The authors develop two models and a partitioning algorithm along with a heuristic procedure for the partial and complete interdiction of arcs, respectively. This study is closer to ours than others due to the multi-commodity flow structure; however, the two problems are structurally different.

Other studies similar in spirit to MTNIP but applied to different fields are as follows. Wollmer (1970b) and Washburn and Wood (1994) develop game-theoretic network-interdiction models. Assimakopoulos (1987) suggests an interdiction model for preventing hospital infections. Anandalingam and Apprey (1991) investigate conflict resolution problems. Church et al. (2004) study the interdiction of supply and emergency response facilities. Salmeron et al. (2004) study the disruptions to electric power grids. Brown et al. (2005) describe a model for planning the pre-positioning of defensive missile interceptors. Brown et al. (2006) apply optimization models to make critical infrastructure more resilient against attacks. Scaparra and Church (2008) study the problem of allocating protective resources among the facilities of a system. Smith et al. (2007) examine the problem of fortifying a network to defend against attacks in the context of survivable network design (e.g., Alevras et al., 1998; Myung et al., 1999; Ouveysi and Wirth, 1999). Desai and Sen (2010) consider the problem of designing reliable networks that satisfy several constraints while simultaneously allocating multiple resources to mitigate the arc failure probabilities such that the total cost of network design and resource allocation is minimized.

In the remainder of this paper, we (1) develop an exact formulation for MTNIP, (2) develop an approximating formulation for MTNIP, (3) present computational results, and (4) conclude with further research directions.

2. Exact formulation of MTNIP

MTNIP is defined on a capacitated, undirected network $G = (N, A)$ with node set N and arc set A consisting of unordered pairs of distinct nodes. Flow on $(i, j) \in A$ can move from i to j or from j to i . The total flow on $(i, j) \in A$, defined by the sum of flows from i to j and from j to i , is restricted by a positive integral capacity u_{ij} .

The network user aims to maximize total flow among $K \geq 3$ disjoint, pre-specified *node groups* $N'_1 \subseteq N, \dots, N'_K \subseteq N$ where each node group acts both as a source and a sink. We define $N' = \bigcup_k N'_k$ to be *special nodes* and $N - N'$ to be *regular nodes*. It is also natural to assume that $|N'| \ll |N|$. The total flow among K node groups is taken to be the sum of K single-commodity flows distinguished by their source groups and restricted by joint capacity constraints. The k th single-commodity flow originates in nodes in N'_k and is delivered through the arcs of the network to nodes in $N' - N'_k$. That is, node group N'_k is a source for commodity k and a sink for any other commodity $k' \neq k$. Maximization of the sum of K single-commodity flows is equivalent to maximizing the total flow routed between $K(K-1)$ pairs of node groups (N'_k, N'_k) with $k \neq k'$. The network user's resulting problem is a *multi-commodity maximum-flow problem* (Costa et al., 2005).

In MTNIP, an interdictor aims to minimize the maximum flow achievable by the network user by destroying arcs. We assume that the interdictor uses a single type of interdiction resource with a total of R units. Interdicting an arc $(i, j) \in A$ requires $r_{ij} > 0$ units of the resource. Partial interdiction of an arc is not allowed, i.e. an arc is either interdicted or not interdicted.

In MTNIP, the network user and the interdictor engage in a two-step, sequential decision-making process: the attacker first allocates limited interdiction resources to destroy arcs so that the maximum flow achievable by the network user is minimized and then the network user maximizes flow through the network given the interdiction decisions of the attacker. In this sense, the interdictor is the *leader* and the network user is the *follower*. This leader-follower relationship is similar to the one in a *static Stackelberg game* (Siman and Cruz, 1973) except that a more general Stackelberg game continues in alternating plays between the leader and the follower. Such a game can be expressed mathematically as a bi-level programming problem (Dempe, 2002). In accordance with this, the interdictor's problem MTNIP is modeled as a bi-level min-max program. Later, we convert it into a mixed-integer linear program (MIP). In the following subsections, the network user's and interdictor's problems are modeled, respectively.

In the rest of the paper, z_p^* and Z_p^{LP} will represent the optimal objective function values for P and for the linear programming relaxation of P , respectively. Similarly, x_p^* and x_p^{LP} will represent the optimal solutions of P and the LP relaxation of P , respectively.

2.1. The formulation of the network user's problem and its dual

The network user's problem is modeled as a *multi-commodity maximum flow problem* (MXF). Let y_{ijk} and y_{jik} be the amounts of flow, respectively, from node i to node j and from node j to i on arc (i, j) for which the source node is any node in N'_k .

2.1.1. Model MXF: Network user's multi-commodity maximum-flow model

$$z^* = \max_y \sum_{k=1, \dots, K} \left(\sum_{(i,j) \in A: i \in N'_k} y_{ijk} + \sum_{(i,j) \in A: j \in N'_k} y_{jik} \right), \tag{1}$$

$$\text{s.t.} \quad \sum_{j: (i,j) \in A \cup (j,i) \in A} y_{ijk} - \sum_{j: (i,j) \in A \cup (j,i) \in A} y_{jik} = 0, \quad k = 1, \dots, K, \quad i \in N - N' : \alpha_{ik}, \tag{2}$$

$$\sum_{k=1, \dots, K} (y_{ijk} + y_{jik}) \leq u_{ij}, \quad (i,j) \in A : \beta_{ij}, \tag{3}$$

$$y_{ijk} \geq 0, \quad y_{jik} \geq 0, \quad k = 1, \dots, K, \quad (i,j) \in A. \tag{4}$$

MXF is the network user's multi-commodity maximum-flow model to maximize flow among node groups N'_k when there is no interdiction. The objective function (1) maximizes the sum of flows originating from each node group N'_k . Constraints (2) are flow-balance constraints for regular nodes. The arc-capacity constraints (3) restrict the amount of flow on each arc to the arc's nominal capacity. Constraints (4) are non-negativity constraints.

We note that MXF can also be modeled by creating a super source connected to N'_k , a super sink connected to $N' - N'_k$, and by maximizing the sum of flows on return arcs from super sinks to super sources. Even though this is the more common approach in most network flow formulations (e.g., Ahuja et al., 1993), we prefer to maximize the sum of flows leaving each node group N'_k in our formulation. This eliminates the flow-balance constraints for nodes in N' .

We assume in our formulation that no flow of commodity k occurs within the node group N'_k and in arcs leading from nodes outside of N'_k into nodes in N'_k . That is, $y_{ijk} \equiv y_{jik} \equiv 0$ for $i, j \in N'_k, k = 1, \dots, K$, and $y_{ijk} \equiv 0$ for $j \in N'_k, i \in N - N'_k, k = 1, \dots, K$. We further assume that nodes in N'_k are neither sources nor transshipment nodes for any other commodity $k' \neq k$. Accordingly, $y_{ijk} \equiv 0$ for $i \in N'_k, j \in N - N'_k$ for each $k' \neq k$. These assumptions can be incorporated into the model by preprocessing the data regarding the network structure. We may define, for example, a three-dimensional matrix \mathbf{A} whose rows and columns are associated with the nodes of the network and whose layers are associated with the commodities so that the entry a_{ijk} takes on the value of 1 if flow is allowed from node i to node j for commodity k and 0 otherwise. Then, set (1) $a_{ijk} = 0$ for $i, j \in N'_k, k = 1, \dots, K$, (2) $a_{jik} = 0$ for $i \in N'_k, j$ is an element of $N - N'_k, k = 1, \dots, K$, and (3) $a_{ijk} = 0$ for $i \in N'_k, j$ is an element of $N - N'_k, k' \neq k, k = 1, \dots, K$.

Next, we give the dual problem D-MXF associated with MXF and derive some results about the properties of the dual variables that will be used later.

2.1.2. Model D-MXF: The dual of the multi-commodity maximum flow model MXF

$$z^* = \min_{\alpha, \beta} \sum_{(i,j) \in A} u_{ij} \beta_{ij}, \tag{5}$$

$$\text{s.t.} \quad -\alpha_{ik} + \alpha_{jk} + \beta_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad i, j \in N - N', \tag{6}$$

$$-\alpha_{jk} + \alpha_{ik} + \beta_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad i, j \in N - N', \tag{7}$$

$$\alpha_{ik} + \beta_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad i \in N - N', \quad j \in N' - N'_k, \tag{8}$$

$$\alpha_{jk} + \beta_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad j \in N - N', \quad i \in N' - N'_k, \tag{9}$$

$$-\alpha_{jk} + \beta_{ij} \geq 1, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad i \in N'_k, \quad j \in N - N', \tag{10}$$

$$-\alpha_{ik} + \beta_{ij} \geq 1, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad j \in N'_k, \quad i \in N - N', \tag{11}$$

$$\beta_{ij} \geq 1, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad i \in N'_k, \quad j \in N - N'_k \quad \text{and} \quad j \in N'_k, \quad i \in N' - N'_k, \tag{12}$$

$$\alpha_{ik}, \text{ free} \quad k = 1, \dots, K, \quad i \in N - N', \tag{13}$$

$$\beta_{ij} \geq 0, \quad (i,j) \in A. \tag{14}$$

In D-MXF, α_{ik} and β_{ij} are dual variables for constraints (2) and (3), respectively. β_{ij} can be viewed as a *distance label* on the arc (i,j) and α_{ik} as the *potential* corresponding to commodity k on node i . Thus, the dual problem is an assignment of potentials to non-terminal/non-special nodes (a zero potential is assigned to terminal/special nodes) and non-negative distance labels to arcs.

We observe that there is an optimal solution to D-MXF such that $-1 \leq \alpha_{ik} \leq 0, \forall i \in N, k = 1, \dots, K$ and $0 \leq \beta_{ij} \leq 1, \forall (i,j) \in A$. This is justified by observing that the coefficient of β_{ij} is positive in the objective function so that making each β_{ij} as small as possible as permitted by the constraints does not cause a loss of optimality. Let A_1, A_2, A_3 and A_4 be the sets of arcs defined for the constraint pairs (6)–(11), and for (12), respectively. That is, $A_1 = \{(i,j) \in A : i, j \in N - N'\}$, $A_2 = \{(i,j) \in A : i \in N - N', j \in N' - N'_k\}$, $A_3 = \{(i,j) \in A : i \in N'_k, j \in N - N'\}$, and $A_4 = \{(i,j) \in A : i \in N'_k, j \in N' - N'_k \text{ and } j \in N'_k, i \in N' - N'_k\}$. Clearly, A_1, A_2, A_3 and A_4 partition the arc set A into four disjoint subsets. Observe that no two variables α_{ik} and $\alpha_{ik'}$ with the same node index i but different commodity indices k and k' appear in the same constraint. Accordingly, the restriction of a variable α_{ik} to the interval $[-1, 0]$ does not affect any other α_{ik} for $k \neq k'$. Constraints (6) and (7) imply that, for each arc $(i,j) \in A_1$, the variable β_{ij} is bounded below by the maximum of $\alpha_{ik} - \alpha_{jk}$ and $-\alpha_{ik} + \alpha_{jk}$ for $k = 1, \dots, K$. Hence, β_{ij} is bounded below by the maximum over k of these bounds. The restriction of the variables α_{ik} and α_{jk} to the interval $[-1, 0]$ for these arcs implies that the lower bound on β_{ij} enforced by constraints (6) and (7) is at most 1. Accordingly, restricting β_{ij} to the interval $[0, 1]$ for such arcs maintains feasibility without causing a loss of optimality. Similarly, constraints (8) and (9) imply that β_{ij} is bounded below by the maximum of $-\alpha_{ik}$ and $-\alpha_{jk}$ for $(i,j) \in A_2$ and $k = 1, \dots, K$. With the restriction of the variables α_{ik} and α_{jk} to the interval $[-1, 0]$ for these arcs, the implied lower bound is at most 1. Hence, we may again restrict β_{ij} to the interval $[0, 1]$ for the arc group A_2 . For arcs $(i,j) \in A_3$, the constraints (10) and (11) imply β_{ij} is bounded below by the maximum of $1 + \alpha_{ik}$ and $1 + \alpha_{jk}$ for $k = 1, \dots, K$. Restriction of the variables α_{ik} and α_{jk} to the interval $[-1, 0]$ for these arcs implies that the maximum of these lower bounds is again at most 1. Hence, we may restrict β_{ij} to the interval $[0, 1]$ for these arcs as well. Constraints (12) imply β_{ij} is bounded below by 1 for arcs in A_4 . Restriction of β_{ij} to the interval $[0, 1]$ for these arcs does not

cause loss of optimality and yields $\beta_{ij} = 1$ in an optimal solution for these arcs. This concludes the justification of our initial claim that there is an optimal solution to D-MXF such that all α_{ik} values are restricted to the interval $[-1, 0]$ and all β_{ij} values are restricted to the interval $[0, 1]$. This result will be useful in converting the bi-level programming formulation of MTNIP into a mixed integer linear program (MIP).

Due to the duality relationship between maximum flow and minimum cut problems, D-MXF is closely related to the NP-hard *minimum multi-way (multi-terminal) cut problem* (MMCP). See, for example, Dahlhaus et al. (1994) and Costa et al. (2005). In MMCP, the purpose is to find a set of arcs with minimum total capacity whose removal from G puts each *terminal* (specific node groups) in a different connected component $G_k = (N_k, A_k), k = 1, \dots, K$. When $K = 2$, the well-known maximum-flow minimum-cut theorem (Ford and Fulkerson, 1956) holds and the set of saturated arcs in a maximum flow identifies also a minimum cut for the dual problem. Hence, the minimum two-way cut in MMCP is directly available as an optimal solution to D-MXF for $K = 2$. On the other hand, the maximum flow among $K \geq 3$ node groups need not be integral and does not in general give a multi-way minimum cut solution. In this case, the strong duality holds for MXF and D-MXF (e.g., Garg et al., 1996; Costa et al., 2005) and this implies that an integral solution x_{D-MXF}^* gives the minimum multi-way cut for MMCP.

2.2. The formulation of the interdicator's problem

In this subsection, the interdicator's problem is modeled as a bi-level, min-max program and then converted into a MIP. The interdicator's decision variable x_{ij} takes on the value of 1 if arc (i, j) is interdicted and 0 otherwise.

2.2.1. Model MTNIP-BI: MTNIP Formulation as a Bi-level Program

$$z^* = \min_{\mathbf{x} \in X} \max_{\mathbf{y}} \sum_{k=1, \dots, K} \left(\sum_{(i,j) \in A: i \in N'_k} y_{ijk} + \sum_{(i,j) \in A: i \in N'_k} y_{jik} \right), \tag{15}$$

s.t. Constraints (2), (4), and

$$\sum_{k=1, \dots, K} (y_{ijk} + y_{jik}) \leq u_{ij}(1 - x_{ij}) \quad (i, j) \in A : \theta_{ij}, \tag{16}$$

where

$$X = \left\{ \mathbf{x} \in \{0, 1\}^{|A|} : \sum_{(i,j) \in A} r_{ij} x_{ij} \leq R \right\}. \tag{17}$$

MTNIP-BI is the interdicator's model to minimize the maximum flow achievable in MXF. For fixed \mathbf{x} , the inner maximization is the network user's maximum-flow model. The objective function (15) minimizes the maximum flow among the subsets N'_k . Constraints (16) set $\sum_{k=1, \dots, K} (y_{ijk} + y_{jik})$ to zero when $x_{ij} = 1$ and to u_{ij} when $x_{ij} = 0$. Constraints (17) limit the expenditure of interdiction resource and require interdiction variables to be binary.

MTNIP-BI is impossible to solve with standard optimization software. It may be possible to solve it by developing specialized decomposition techniques as offered by Israeli and Wood (2002). However, we prefer a simpler method that allows us to convert MTNIP-BI into a MIP and then to solve it directly by using standard software.

Our method consists of (1) taking the dual of the inner maximization by fixing \mathbf{x} temporarily and then releasing \mathbf{x} to obtain a mixed-integer nonlinear "min-min" model, which is simply a minimization model, and (2) linearizing the nonlinear model to get a MIP.

2.2.2. Model MTNIP-MINP: MTNIP formulation as a mixed integer nonlinear program

$$z^* = \min_{\mathbf{x}} \min_{\alpha, \theta} \sum_{(i,j) \in A} u_{ij}(1 - x_{ij})\theta_{ij}, \tag{18}$$

$$\text{s.t.} \quad -\alpha_{ik} + \alpha_{jk} + \theta_{ij} \geq 0, \quad k = 1, \dots, K, (i, j) \in A, i, j \in N - N', \tag{19}$$

$$-\alpha_{jk} + \alpha_{ik} + \theta_{ij} \geq 0, \quad k = 1, \dots, K, (i, j) \in A, i, j \in N - N', \tag{20}$$

$$\alpha_{ik} + \theta_{ij} \geq 0, \quad k = 1, \dots, K, (i, j) \in A, i \in N - N', j \in N' - N'_k, \tag{21}$$

$$\alpha_{jk} + \theta_{ij} \geq 0, \quad k = 1, \dots, K, (i, j) \in A, j \in N - N', i \in N' - N'_k, \tag{22}$$

$$-\alpha_{jk} + \theta_{ij} \geq 1, \quad k = 1, \dots, K, (i, j) \in A, i \in N'_k, j \in N - N', \tag{23}$$

$$-\alpha_{ik} + \theta_{ij} \geq 1, \quad k = 1, \dots, K, (i, j) \in A, j \in N'_k, i \in N - N', \tag{24}$$

$$\theta_{ij} \geq 1, \quad k = 1, \dots, K, (i, j) \in A, i \in N'_k, j \in N' - N'_k \text{ and } j \in N'_k, i \in N' - N'_k, \tag{25}$$

$$\sum_{(i,j) \in A} r_{ij} x_{ij} \leq R, \tag{26}$$

$$x_{ij} \in \{0, 1\} \quad (i, j) \in A, \tag{27}$$

$$\alpha_{ik}, \text{ free } k = 1, \dots, K, i \in N - N', \tag{28}$$

$$\theta_{ij} \geq 0, \quad (i, j) \in A, \tag{29}$$

Let MXF (\mathbf{x}) be the version of MXF with upper bounds u_{ij} in MXF replaced by the upper bounds $u_{ij}(1 - x_{ij})$ and let D-MXF (\mathbf{x}) be the dual of MXF (\mathbf{x}). That is, MXF (\mathbf{x}) is the inner maximization in MTNIP-BI defined by (15), (2), (4), and (16) and D-MXF (\mathbf{x}) is the inner minimization in MTNIP-MINP defined by (18)–(25), (28), and (29). The dual variables α_{ik} and θ_{ij} in MTNIP-MINP correspond to constraints (2) and

(16), respectively. Observe that θ_{ij} plays in D-MXF (\mathbf{x}) the role of β_{ij} in D-MXF so that the restriction of θ_{ij} to the interval $[0, 1]$ does not cause a loss of optimality in D-MXF (\mathbf{x}). This restriction allows us to use the linearization that replaces $(1 - x_{ij})\theta_{ij}$ with $\eta_{ij} \geq 0$ and adding the set of constraints $\eta_{ij} \geq \theta_{ij} - x_{ij}$. This yields the following MIP.

2.2.3. Model MTNIP-MILP: MTNIP as a mixed-integer linear program

$$z^* = \min_{\alpha, \theta, x, \eta} \sum_{(i,j) \in A} u_{ij} \eta_{ij} \tag{30}$$

s.t Constraints (17)–(27) and

$$\eta_{ij} \geq \theta_{ij} - x_{ij} \quad (i,j) \in A, \tag{31}$$

$$\eta_{ij} \geq 0 \quad (i,j) \in A, \tag{32}$$

If $x_{ij} = 0$ in an optimal solution to MTNIP-MINP, the corresponding term in the objective function (18) is equal to $u_{ij}\theta_{ij}$. If $x_{ij} = 1$ in an optimal solution, then the corresponding term in (18) is 0. Thus, for the linearization to work, it must be true that $\eta_{ij} = 0$ when $x_{ij} = 1$ and that $\eta_{ij} = \theta_{ij}$ when $x_{ij} = 0$. When $x_{ij} = 1$, constraints (31) are satisfied for $0 \leq \theta_{ij} \leq 1$ and for $0 \leq \theta_{ij} \leq 0$. However, because setting η_{ij} to any value greater than 0 unnecessarily increases the objective function value, η_{ij} must be zero. When $x_{ij} = 0$, constraint (31) is satisfied for $\eta_{ij} \geq \theta_{ij}$. However, due to the minimizing objective function (30), it must be true that $\eta_{ij} = \theta_{ij}$. This justifies the correctness of the linearization.

Next, we argue that forcing constraints (31) to equality does not cause a loss of optimality. To see this, observe that whenever $\theta_{ij} = 0$, the right side of (31) is either 0 or -1 so that (32) forces η_{ij} to be non-negative. Taking $\eta_{ij} = 0$ will not cause loss of optimality since the coefficient u_{ij} of η_{ij} in the objective function is positive. Furthermore, taking $x_{ij} = 0$ in this case will also maintain optimality while maintaining feasibility. Hence, (31) can be taken as equality whenever $\theta_{ij} = 0$. In the remaining case, $\theta_{ij} > 0$ and x_{ij} is either 0 or 1. If $x_{ij} = 0$, then (31) reduces to $\eta_{ij} \geq \theta_{ij}$. In this case, taking $\eta_{ij} = \theta_{ij}$ gives an objective value which is at least as good as taking $\eta_{ij} > \theta_{ij}$. If $x_{ij} = 1$, then the right side of (31) is either zero or negative. In this case, η_{ij} is bounded below by zero and optimality is achieved by taking it to be zero. If the right hand side of (31) is negative in this case (i.e., if $\theta_{ij} < 1$), then we may increase θ_{ij} to 1 to make the right side of (31) equal to zero, thereby achieving equality in (31).

2.2.4. Model MTNIP-E: Final version of the exact formulation for MTNIP

$$z^* = \min_{\alpha, \eta, x} \sum_{(i,j) \in A} u_{ij} \eta_{ij}, \tag{33}$$

$$\text{s.t. } -\alpha_{ik} + \alpha_{jk} + \eta_{ij} + x_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad i, j \in N - N', \tag{34}$$

$$-\alpha_{jk} + \alpha_{ik} + \eta_{ij} + x_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad i, j \in N - N', \tag{35}$$

$$\alpha_{ik} + \eta_{ij} + x_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad i \in N - N', \quad j \in N' - N'_k, \tag{36}$$

$$\alpha_{jk} + \eta_{ij} + x_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad j \in N - N', \quad i \in N' - N'_k, \tag{37}$$

$$-\alpha_{jk} + \eta_{ij} + x_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad i \in N'_k, \quad j \in N - N', \tag{38}$$

$$-\alpha_{ik} + \eta_{ij} + x_{ij} \geq 1, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad j \in N'_k, \quad i \in N - N', \tag{39}$$

$$\eta_{ij} + x_{ij} \geq 1, \quad k = 1, \dots, K, \quad (i,j) \in A, \quad i \in N'_k, \quad j \in N' - N'_k \quad \text{and} \quad j \in N'_k, \quad i \in N' - N'_k, \tag{40}$$

$$\sum_{(i,j) \in A} r_{ij} x_{ij} \leq R, \tag{41}$$

$$x_{ij} \in \{0, 1\} \quad (i,j) \in A, \tag{42}$$

$$\alpha_{ik}, \text{ free} \quad k = 1, \dots, K, \quad i \in N - N', \tag{43}$$

$$\eta_{ij} \geq 0, \quad (i,j) \in A, \tag{44}$$

$z_{\text{MTNIP-E}}^*$ gives the maximum flow achievable by the network user after interdiction. When $R = 0$, MTNIP-E resembles D-MXF (or when $\eta_{ij} + x_{ij}$ is replaced by β_{ij}). In this case, $z_{\text{MTNIP-E}}^* = z_{\text{D-MXF}}^* = z_{\text{MXF}}^*$. As R is increased, the value of $z_{\text{MTNIP-E}}^*$ decreases. The decrease in the objective function value is determined depending on which paths between node groups are disconnected by the interdiction of arcs and the flow values on the disconnected paths.

The term $\eta_{ij} + x_{ij}$ and α_{ik} in MTNIP-E can be interpreted as θ_{ij} and α_{ik} in D-MXF (\mathbf{x}), respectively, to gain more insight about the solutions to MTNIP-E and its dual, post-interdiction MXF. This is a result of the fact that $\eta_{ij} + x_{ij} \leq 1$ in an optimal solution. Because R is limited and the objective value will unnecessarily increase when $\eta_{ij} > 0$, there is no incentive in setting $x_{ij} = 1$ and $\eta_{ij} = 0$, simultaneously. Moreover, because $0 \leq \theta_{ij} \leq 1$ and θ_{ij} is replaced by $\eta_{ij} + x_{ij}$ to obtain MTNIP-E, $\eta_{ij} + x_{ij} \leq 1$ follows. Thus, using complementary slackness conditions of optimality for MXF and D-MXF, $\eta_{ij}^* > 0$ implies that $\sum_{k=1, \dots, K} (y_{ijk}^* + y_{jik}^*) = u_{ij}$ and $y_{jik}^* > 0$ implies that $-\alpha_{ik}^* + \alpha_{jk}^* + \eta_{ij}^* + x_{ij} = \delta_{ijk}$ with δ_{ijk} being the right-hand-side values of constraints (34)–(40). If a constraint in (34)–(40) corresponding to β_{ijk} is not satisfied at equality, $y_{ijk}^* = 0$. When $x_{ij} = 1$, $\eta_{ij} > 0$ in MXF. That is, the set of arcs to interdict is chosen from among the set of saturated arcs in MXF.

An optimal solution to MTNIP-E gives an optimal interdiction plan \mathbf{x}^* to the attacker for a specific scenario. By analyzing multiple scenarios with different values/sets of R , N'_k , or other parameters, an interdictor can develop an attack plan. From the point of the network user, \mathbf{x}^* can be regarded as the smallest set of arcs to be hardened. Thus, the network user can also develop a robust defense plan or system by going through several what-if analyses.

The models developed assume that all special node groups can be both source and sink. However, the formulations can easily be adapted to situations in which some special nodes are only source or only sink. Models can easily be extended to handle issues such as interdicting nodes, disallowing interdiction of certain arcs, allowing partial arc interdiction, and using different types of interdiction resources.

MTNIP-E is an exact model for MTNIP because it explicitly minimizes the maximum amount of flow among node groups. Although an exact solution is highly desirable, computational studies show that MTNIP-E is difficult to solve. This leads us to develop a new, easy-to-solve approximating model, which is given next.

3. Approximate formulation of MTNIP

Multi-partition network-interdiction model (MPNIM) is a binary-integer program. It does not minimize the maximum flow among N'_1, \dots, N'_K directly. Instead, it partitions N into K disjoint subsets N_1, \dots, N_K with $N'_1 \subseteq N_1, \dots, N'_K \subseteq N_K$ and interdicts certain arcs connecting the subsets N_k , while observing constraints on interdiction resources. The objective is to minimize the total capacity of the non-interdicted arcs crossing between N_k .

Three decision variables are used in MPNIM: (1) x_{ij} that takes on the value of 1 if arc (i, j) crosses between two different subsets and is interdicted; 0 otherwise, (2) ω_{ij} that takes on the value of 1 if node i is assigned to N_k ; 0 otherwise, and (3) λ_{ij} that takes on the value of 1 if arc (i, j) crosses between two different subsets and is not interdicted; 0 otherwise.

3.1. Model MPNIM: Multi-partition network-interdiction model

$$z^* = \min_{x, \lambda, \omega} \sum_{(i,j) \in A} u_{ij} \lambda_{ij}, \quad (45)$$

$$\text{s.t.} \quad \sum_k \omega_{ik} = 1, \quad i \in N, \quad (46)$$

$$\omega_{ik} - \omega_{jk} + \lambda_{ij} + x_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i, j) \in A, \quad (47)$$

$$-\omega_{ik} + \omega_{jk} + \lambda_{ij} + x_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i, j) \in A, \quad (48)$$

$$x_{ij} + \lambda_{ij} \leq 1, \quad (i, j) \in A, \quad (49)$$

$$\sum_{(i,j) \in A} r_{ij} x_{ij} \leq R, \quad (50)$$

$$\omega_{ik} \equiv 1, \quad k = 1, \dots, K, \quad i \in N'_k, \quad (51)$$

$$\omega_{ik'} \equiv 0, \quad k' = 1, \dots, K, \quad i \in N'_k, \quad k \neq k', \quad (52)$$

$$x_{ij} \in \{0, 1\}, \quad (i, j) \in A, \quad (53)$$

$$\lambda_{ij} \in \{0, 1\}, \quad (i, j) \in A, \quad (54)$$

$$\omega_{ik} \in \{0, 1\}, \quad k = 1, \dots, K, \quad i \in N, \quad (55)$$

The objective (45) minimizes the sum of the capacities on non-interdicted arcs crossing between different node subsets. Constraints (46) require each node i to belong to exactly one subset N_k . Constraints (47) and (48) enforce a partitioning of the nodes and determine whether an arc crosses between two subsets:

- (1) If $i, j \in N_k$, then $\omega_{ik} - \omega_{jk} = 0$ and $\omega_{jk} - \omega_{ik} = 0$, which allows $x_{ij} = 0$ and $\lambda_{ij} = 0$. $x_{ij} = 1$ and/or $\lambda_{ij} = 1$ are also feasible to constraints (47) and (48) in this case, but we may assume that both are 0 because: (a) $\lambda_{ij} = 0$ contributes less to the objective function than does $\lambda_{ij} = 1$, and (b) $x_{ij} = 0$ consumes less resource than does $x_{ij} = 1$. (Alternate optimal solutions with $x_{ij} = 1$ are possible if excess resource exists.)
- (2) If $i \in N_k$ and $j \in N_{k'}, k \neq k'$ then $x_{ij} + \lambda_{ij} = 1$ is required to maintain feasibility. So, either $x_{ij} = 1$, indicating that arc (i, j) is interdicted or $\lambda_{ij} = 1$, indicating that this arc is not interdicted and contributes to the inter-subset capacity after interdiction.

MPNIM classifies the arcs in the network into three groups: (a) Arcs that cross between subsets and are interdicted, (b) arcs that cross between subsets and are not interdicted, and (c) arcs that do not cross between subsets. Constraints (49) together with (47) and (48) ensure that each arc is in one of these three groups. Note that constraints (49) are actually implied by the structure of the model. However, the constraints are added explicitly to prevent from violations that may occur in the case of excess interdiction resource without changing the objective function value. Constraint (50) limits the usage of the interdiction resource as before. Constraints (51) set $\omega_{ik} = 1$ if node i is pre-assigned to node subset N_k , i.e., $i \in N'_k$, and constraints (52) set $\omega_{ik'} = 0$ if $i \in N'_k$ and $k \neq k'$. Constraints (53) and (55) are set restrictions on the decision variables.

Proposition 1. *MPNIM solves MMCP when $R = 0$.*

Proof. Solving MPNIM by setting $R = 0$ is clearly equivalent to solving the following model. \square

3.2. MPNIMC: Multi-way cut model using MPNIM

In addition to (45), (46), (51), (52), (54), and (55):


$$\omega_{ik} - \omega_{jk} + \lambda_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i, j) \in A, \quad (56)$$

$$-\omega_{ik} + \omega_{jk} + \lambda_{ij} \geq 0, \quad k = 1, \dots, K, \quad (i, j) \in A. \quad (57)$$


Table 1

Model statistics and run times for MTNIM-E and MPNIM on GN. “[]” indicates that the model could not be solved in 86400 seconds and that shows the best solution found and the integrality gap at termination.

G	n_1	n_2	$ N $	$ A $	R	K	MPNIM		MTNIP-E		D_z $D_{\bar{z}} - D_{\underline{z}}$
							z^*	Run time (s)	z^*	Run time (s)	
1	7	4	28	63	9	3	16	0.00	16	0.00	100.0%
					11	3	0	0.00	0	0.02	100.0%
					6	4	334	0.00	322.5	0.05	103.6%
					11	4	144	0.00	144	0.06	100.0%
2	10	6	60	149	10	3	321	0.03	321	0.34	100.0%
					11	4	427	0.48	416.5	49.42	102.5%
					16	4	221	0.67	221	20.80	100.0%
					25	4	0	0.03	0	0.61	100.0%
3	14	7	98	263	11	3	243	0.03	243	1.05	100.0%
					20	3	0	0.05	0	1.03	100.0%
					16	4	313	0.06	313	199.33	100.0%
					20	4	149	0.08	149	2417.25	100.0%
4	14	9	126	333	11	4	863	1.95	781.5	81680.4	110.4%
					20	4	426	2.19	426–25.86%	86400.0	100%–121%
					11	5	1414	5.33	1090.5–5.5%	86400.0	129%–137%
					20	5	924	17.53	784–21.86%	86400.0	118%–150%

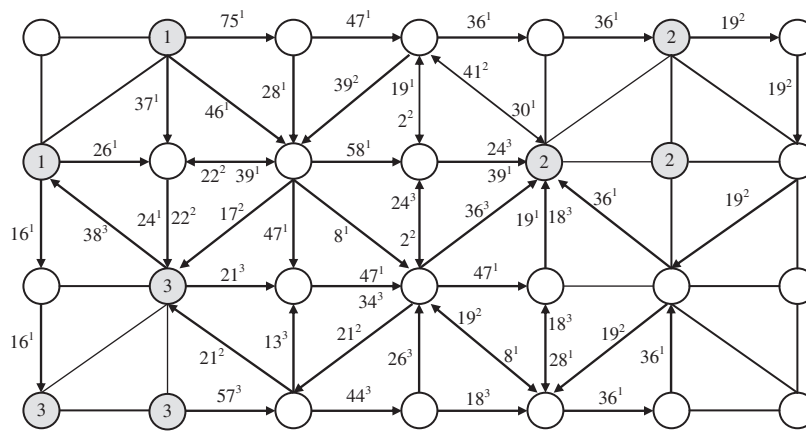

(a) Max-flow solution before interdiction with $z^* = 376$ ($R=0$).

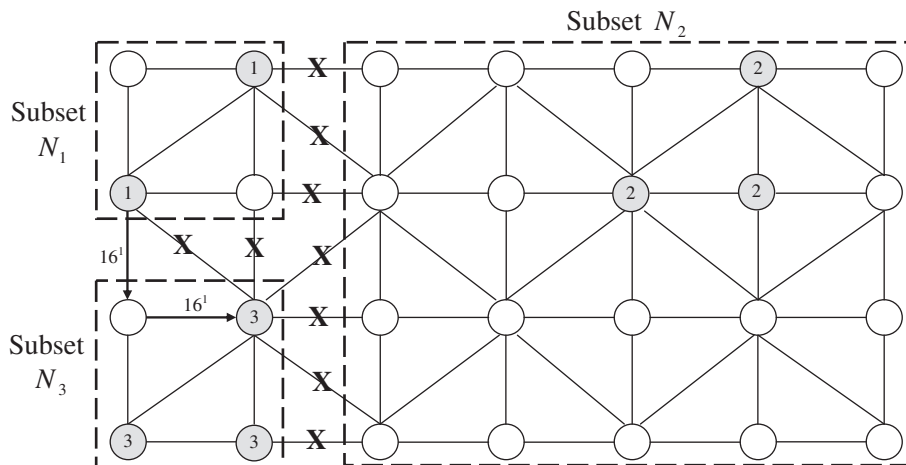

(b) Max-flow solution after interdiction with $z^* = 16$ ($R=9$).

Fig. 1. Maximum flow solutions for Pr.1 of GN instances before and after interdiction. The shaded nodes with numbers are special nodes while all other nodes are regular nodes. Special nodes with the same number belong to the same node group. The undirected arcs do not carry any flow while directed arcs show the direction of the flow. The values on the directed arcs represent the flow values with superscripts showing the origin of the flow. The arcs with an X are interdicted arcs, which are the same for both MPNIM and MTNIP-E. The nodes enclosed within a rectangle with dashed lines belong to the same node subset imposed by MPNIM.

In MPNIMC, the partitioning of the node set is similar to the one in MPNIM. If $i, j \in N_k$, then $\lambda_{ij} = 0$ can be assumed due to the objective function. If $i \in N_k$ and $j \in N_{k'}, k \neq k'$, then $\lambda_{ij} = 1$ for feasibility. The set of arcs with $\lambda_{ij} = 1$ constitutes the minimum multi-way cut due to the minimizing objective function.

When there is a solution for either MPNIMC or integral D-MXF, a solution for the other can be obtained. It can be checked that setting $\beta_{ij} = 1$ in D-MXF for $\lambda_{ij} = 1$ in MPNIMC and setting $\alpha_{ik} = -1$ in D-MXF for $\omega_{ik} = 1$ with $i \in N - N'$ in MPNIMC gives a feasible solution for the integral D-MXF. Similarly, a solution for MPNIMC can be obtained from a solution of D-MXF.

Proposition 2. z_{MPNIM}^* provides an upper bound on $z_{MTNIP-E}^*$.

Proof. Let Z_{ID-MXF}^* be the optimal objective function value to integral D-MXF. Proposition 1 implies that $z_{MPNIMC}^* = Z_{ID-MXF}^* \geq z_{D-MXF}^*$. Moreover, $z_{D-MXF}^* \geq z_{MTNIP-E}^*$, $z_{MPNIMC}^* \geq z_{MPNIM}^*$, and $z_{MPNIMC}^* \geq z_{MTNIP-E}^*$ can be established. MTNIP-E and MPNIM are obtained from D-MXF and MPNIMC, respectively, in a similar manner and by adding the same set of interdiction constraints $X = \{x \in \{0, 1\}^{|A|} : \sum_{(i,j) \in A} r_{ij} x_{ij} \leq R\}$. Specifically, $n_{ij} + x_{ij}$ in MTNIP-E replaces β_{ij} in D-MXF and $\lambda_{ij} + x_{ij}$ in MPNIM replaces λ_{ij} in MPNIMC where $\eta_{ij} + x_{ij} \leq 1$ and $\lambda_{ij} + x_{ij} \leq 1$. Thus, the feasible regions of MTNIP-E and MPNIM are the union of the feasible regions of D-MXF and MPNIMC, respectively, with the interdiction set X . It follows that $z_{MPNIM}^* \geq z_{MTNIP-E}^*$. □

Computational studies show that $z_{MPNIM}^* = z_{MTNIP-E}^*$ for some test problems. However, there are many instances for which $z_{MPNIM}^* > z_{MTNIP-E}^*$. The results show that, for optimally solved problems, the difference between z_{MPNIM}^* and $z_{MTNIP-E}^*$ can be as much as 46.2%. However, notice that $z_{MTNIP-E}^*$ gives the post-interdiction flow capacity through the network while z_{MPNIM}^* gives the post-interdiction multi-cut capacity (due to Proposition 1). We remark that all of the capacities of non-interdicted arcs constituting z_{MPNIM}^* do not necessarily contribute to the flow capacity. The post-interdiction flow capacity for MPNIM, $z_{MPNIM-F}^*$, may be less than z_{MPNIM}^* . Let X_{MPNIM}^* represent the optimal set of interdicted arcs in MPNIM. Then, $z_{MPNIM-F}^*$ can be evaluated by solving either: (1) MXF after removing X_{MPNIM}^* from the network, or (2) MPNIM-F obtained by setting $x_{ij} = 1$ for $(i, j) \in X_{MPNIM}^*$ in MTNIP-E. In our study, we prefer the latter.

Proposition 3. $z_{MPNIM}^* \geq z_{MPNIM-F}^* \geq z_{MTNIP-E}^*$.

Proof. It is clear that $z_{MPNIM-F}^* \geq z_{MTNIP-E}^*$. $z_{MPNIM}^* \geq z_{MPNIM-F}^*$ must also be true because otherwise Proposition 2 is contradicted. □

4. Computational studies

We test MTNIP-E and MPNIM using three different types of networks, grid networks (GN), Euclidean-distance networks (EN), and random networks (RN), each with four different sets of data.

Table 2
Model statistics and run times for MTNIP-E and MPNIM on RN. “[]” indicates that the model could not be solved in 86400 seconds and that shows the best solution found and the integrality gap at termination.

Pr. Id.	G	N	A	R	K	MPNIM		MTNIP-E		$\frac{D_z}{D_z - D_2}$
						z^*	Run time (s)	z^*	Run time (s)	
1	1	30	435	9	3	5358	0.05	4655.5	0.23	115.09%
2				11	3	5173	0.03	4542.5	0.61	113.88%
3				20	3	4376	0.06	4101.5	918.77	106.69%
4				30	3	3562	0.03	3562	17605.33	100.00%
5				6	4	9091	0.03	6889	0.09	131.96%
6				11	4	8610	0.03	6495	0.26	132.56%
7				20	4	7763	0.03	5960	41.56	130.25%
8				30	4	6871	0.05	5469–0.67%	86400	125.64%–126.48%
9	2	60	1770	10	3	15743	0.09	13435	2.20	117.18%
10				30	3	13887	0.11	12409–1.71%	86400	111.91%–113.86%
11				11	4	23362	0.11	17613	1.14	132.64%
12				16	4	22878	0.13	17236	1.44	132.73%
13				25	4	22030	0.13	16648	32.97	132.33%
14				40	4	20656	0.13	15852–1.12%	86400	130.31%–131.78%
15				50	4	19765	0.13	15362–2.37%	86400	128.66%–131.78%
16				60	4	18894	0.13	14881–4.36%	86400	126.97%–132.76%
17	3	90	4005	11	3	28493	0.36	23240.5	3.16	122.60%
18				20	3	27624	0.36	22609.5	2318.49	122.18%
19				40	3	25760	0.42	21617–2.07%	86400	119.17%–121.68%
20				60	3	23963	0.59	20658–5.16%	86400	116.00%–122.31%
21				16	4	39800	0.47	29158.5	5.94	136.50%
22				20	4	39408	0.45	28847.5	7.50	136.61%
23				40	4	37503	0.50	27627–0.57%	86400	135.75%–136.53%
24				60	4	35668	0.59	26647–2.34%	86400	133.85%–137.06%
25	4	120	7140	11	4	60018	0.91	45012	7.26	133.34%
26				20	4	59128	0.91	44221	30.45	133.71%
27				40	4	57179	0.91	42817–0.14%	86400	133.54%–133.73%
28				60	4	55269	0.88	41763.5–1.32%	86400	132.34%–134.11%
29				11	5	76175	0.97	53970	10.64	141.14%
30				20	5	75284	0.97	53167.5	23.67	141.60%
31				40	5	73321	0.94	51572.5	159.94	142.17%
32				60	5	71391	0.99	50261–0.37%	86400	142.04%–147.5%

Table 3

Model statistics and run times for MTNIP-E and MPNIM on EN. “[]” indicates that the model could not be solved in 86400 seconds and that shows the best solution found and the integrality gap at termination.

Pr. Id.	G	N	A	R	K	MPNIM		MTNIP-E		D_z $D_z - D_z$
						z^*	Run time (s)	z^*	Run time (s)	
1	1	30	435	9	3	4148	0.02	4026.5	18.44	103.02%
2				11	3	3991	0.02	3935.5	37.63	101.41%
3				20	3	3378	0.03	3378	61.80	100.00%
4				30	3	2778	0.02	2778	52.50	100.00%
5				6	4	7717	0.03	6188.5	0.22	124.70%
6				11	4	7280	0.03	5893.5	0.33	123.53%
7				20	4	6534	0.03	5409.5	2.33	120.79%
8				30	4	5757	0.03	4915	87.66	117.13%
9	2	60	1770	10	3	19491	0.11	16639	0.33	117.14%
10				30	3	17493	0.14	15397-0.29%	86400	113.61%–113.94%
11				11	4	26981	0.14	20941	0.39	128.84%
12				16	4	26458	0.14	20536	2.26	128.84%
13				25	4	25566	0.14	19908	3.56	128.42%
14				40	4	24164	0.13	18954.5-0.01%	19.94	127.48%–127.50%
15				50	4	23277	0.14	18387.5	47249	126.59%
16				60	4	22407	0.17	17854-0.92%	86400	125.50%–126.67%
17	3	90	4005	11	3	22926	0.36	20323	17.42	112.81%
18				20	3	22167	0.36	19862.5	6298.24	111.60%
19				40	3	20582	0.38	18924-1.13%	86400	108.76%–110.00%
20				60	3	19079	0.53	18060.5-2.99%	86400	105.64%–108.90%
21				16	4	38162	0.63	28390	413.97	134.42%
22				20	4	37789	0.58	28171	48720.70	134.14%
23				40	4	36024	0.84	27133-1.13%	86400	132.77%–134.29%
24				60	4	34356	0.69	26156-3.00%	86400	131.35%–135.41%
25	4	120	7140	11	4	50241	1.11	37594.5	29.67	133.64%
26				20	4	49376	1.16	36979.5	46.11	133.52%
27				40	4	47562	1.38	35939-0.93%	86400	132.34%–133.58%
28				60	4	45850	1.22	34964-1.94%	86400	131.13%–133.73%
29				11	5	72376	3.17	49616.5	34.89	145.87%
30				20	5	71475	2.52	48961.5	51.14	145.98%
31				40	5	69566	3.86	47586.5	2249.93	146.19%
32				60	5	67745	3.77	46410.5-0.62%	86400	145.97%–146.88%

GN are $n_1 \times n_2$ networks where n_1 and n_2 are the number of nodes in the horizontal and vertical axes, respectively. The number of nodes and arcs change from 28 to 126 and from 63 to 333, respectively. The arc capacities are randomly drawn from the discrete uniform distribution on [13, 99]. EN are complete graphs where the locations of nodes are generated randomly with an uniform distribution in a square on [1, 100]. The arc capacities are assigned as the Euclidean distances between the nodes set to integer units. RN are also complete graphs where the arc capacities are randomly drawn from the discrete uniform distribution on [1, 100]. The number of nodes and arcs in EN and RN change from 30 to 120 and from 435 to 7140, respectively. It is assumed that $r_{ij} = 1$ for all arcs (i, j) in all three types of networks. Different values of R and K are used for all networks.

Computational tests are performed on a PC with 3.0 GHz Intel Core 2 Duo processor and 3 GB of RAM by using the solver CPLEX 9.0. The models are run until the optimality is attained or for 24 hour (86400 seconds) at maximum by using default settings of CPLEX, e.g., moving the best bound strategy for branching is used, cuts are allowed (ILOLOG, 2003). In the tables, run times and z^* are given for problems solved to optimality. For problems not solved to optimality, the resulting objective value and the integrality gap $|\text{BP} - \text{BF}| / (10^{-10} + |\text{BP}|)$, where BP is the objective value of the best integer solution and BF is the best remaining objective value of any unexplored node (ILOLOG, 2003), are given.

The objective values of MTNIP-E and MPNIM are compared by using the statistic $D_z = 100\% \times (z_{\text{MPNIM}}^* / z_{\text{MTNIP-E}}^*)$ for problems solved to optimality. For problems not solved optimally, D_z and D_z obtained by replacing $z_{\text{MTNIP-E}}^*$ in D_z with upper bound $\bar{z}_{\text{MTNIP-E}}$ and lower bound $\underline{z}_{\text{MTNIP-E}}$ reached at the end of allotted time, respectively, are used. To compare the objective values of MPNIM-F and MTNIP-E, $D_z^F = 100\% \times (z_{\text{MPNIM-F}}^* / z_{\text{MTNIP-E}}^*)$ is used.

Table 1 gives results for test problems on GN. MPNIM can optimally solve all of 16 test problems with solution times ranging from 0 to 17.53 seconds. MTNIP-E can optimally solve 13 problems with solution times changing from 0 to 81680 seconds. The remaining three problems not solved by MTNIP-E are solved by MPNIM with the worst solution time being 17.53 seconds. $D_z = 100\%$ for 10 of the 13 problems solved optimally by both models, i.e., the objective function values of the models are the same. D_z for the remaining three problems are 103.6%, 102.5%, and 110.4%, respectively. D_z and D_z for problems not solved optimally by MTNIP-E change from 121% to 150% with an average of 136% and from 100% to 129% with an average of 115.67%, respectively.

To give a pictorial view of the effect of the interdicator with respect to flow capacity through a network, the maximum flow solutions before and after interdiction for Pr.1 of the GN instances are given in Fig. 1. Fig. 1(a) shows the flow values on the arcs together with the directions and origins when there is no interdicator, i.e., $R = 0$. The maximum flow value achieved in this case is 376. Fig. 1(b) indicates the interdicted arcs and flow values for $R = 9$. For this instance, the set of interdicted arcs determined by MPNIM and MTNIP-E are the same. After interdiction, there remain only two flow paths for flow to occur, both of which achieve the maximum flow of 16. Note that one additional unit of resource is needed to cut off the remaining two flow paths. Fig. 1(b) also shows the partitioning of the node set into subsets resulting from the solution of MPNIM.

Table 2 gives results for test problems on RN. MPNIM can optimally solve all of 32 test problems with solution times changing from ranging from 0.03 to 0.99 seconds. MTNIP-E can optimally solve only 20 problems with solution times changing from 0.09 to 17605

Table 4
Comparison of the objective function values of MPNIM-F and MTNIP-E for problems solved optimally by both MPNIM and MTNIP-E.

Pr. Id.	GN			RN			EN		
	$Z_{\text{MPNIM-F}}^*$	$Z_{\text{MTNIP-E}}^*$	$D_{z^*}^F$	$Z_{\text{MPNIM-F}}^*$	$Z_{\text{MTNIP-E}}^*$	$D_{z^*}^F$	$Z_{\text{MPNIM-F}}^*$	$Z_{\text{MTNIP-E}}^*$	$D_{z^*}^F$
1	16	16	100.00%	4655.5	4655.5	100.00%	4102	4026.5	101.88%
2	0	0	100.00%	4542.5	4542.5	100.00%	3991	3935.5	101.41%
3	334	322.5	103.57%	4336	4101.5	105.72%	3378	3378	100.00%
4	144	144	100.00%	3562	3562	100.00%	2778	2778	100.00%
5	321	321	100.00%	7098.5	6889	103.04%	6283.5	6188.5	101.54%
6	427	416.5	102.52%	6858	6495	105.59%	6065	5893.5	102.91%
7	221	221	100.00%	6340	5960	106.38%	5692	5409.5	105.22%
8	0	0	100.00%	No optimal solution			5303.5	4915	107.90%
9	243	243	100.00%	13723	13435	102.14%	16958	16639	101.92%
10	0	0	100.00%	No optimal solution			No optimal solution		
11	313	313	100.00%	18027	17613	102.35%	21302.5	20941	101.73%
12	149	149	100.00%	17736	17236	102.90%	20884	20536	101.69%
13	832	781.5	106.46%	17264	16648	103.70%	20061	19908	100.77%
14	No optimal solution			No optimal solution			No optimal solution		
15	No optimal solution			No optimal solution			18799	18387.5	102.24%
16	No optimal solution			No optimal solution			No optimal solution		
17				23240.5	23240.5	100.00%	20415	20323	100.45%
18				23107.5	22609.5	102.20%	20036	19862.5	100.87%
19				No optimal solution			No optimal solution		
20				No optimal solution			No optimal solution		
21				29611	29158.5	101.55%	28703	28390	101.10%
22				29415	28847.5	101.97%	28516	28171	101.22%
23				No optimal solution			No optimal solution		
24				No optimal solution			No optimal solution		
25				45519	45012	101.13%	37821.5	37594.5	100.60%
26				45074	44221	101.93%	37389	36979.5	101.11%
27				No optimal solution			No optimal solution		
28				No optimal solution			No optimal solution		
29				54476	53970	100.94%	49882	49616.5	100.54%
30				54030.5	53167.5	101.62%	49431.5	48961.5	100.96%
31				53000	51572.5	102.77%	48477	47586.5	101.87%
32				No optimal solution			No optimal solution		

seconds. 12 problems not solved by MTNIP-E are solved by MPNIM with solution times changing from 0.05 to 0.99 seconds. $D_{z^*} = 100\%$ for only 1 problem out of 20 solved optimally by both models. D_{z^*} for the remaining 19 problems change from 106.69% to 142.17% with an average of 129.86%. D_z and $D_{\bar{z}}$ for problems not solved optimally by MTNIP-E change from 113.86% to 147.5% with an average of 130.8% and from 111.91% to 135.75% with an average of 126.74%, respectively.

Table 3 gives results for test problems on EN. MPNIM can optimally solve all of 32 test problems with solution times ranging from 0.02 to 3.86 seconds. MTNIP-E can optimally solve only 22 of the problems with solution times changing from 0.22 to 48720.70 seconds. 10 problems not solved by MTNIP-E are solved by MPNIM with the solution times ranging from 0.13 to 3.77 seconds. $D_{z^*} = 100\%$ for only 2 problems out of 22 solved optimally by both models. D_{z^*} for the remaining 20 problems change from 101.41% to 146.19% with an average of 125.93%. D_z and $D_{\bar{z}}$ for problems not solved optimally by MTNIP-E change from 108.9% to 146.88% with an average of 127.09% and from 105.64% to 145.97% with an average of 125.45%, respectively.

The previous results show that MPNIM is incomparably better than MTNIP-E with respect to solution times and that $Z_{\text{MPNIM}}^* \geq Z_{\text{MTNIP-E}}^*$ in compliance with Proposition 2. To summarize, $D_{z^*} = 100\%$ for 13 problems out of 56 optimally-solved problems, for which the average D_{z^*} is 120.33%. For the remaining 43 problems, the worst and the average D_{z^*} are 146.19% and 126.33%, respectively. The best D_{z^*} values are obtained for problems on GN with an average of 101.27%. Average D_{z^*} values for RN and EN are 128.44% and 123.57%, respectively.

Table 4 gives $D_{z^*}^F$ for test problems solved optimally by both MPNIM and MTNIP-E. For GN, $D_{z^*}^F$ change from 100% to 106.46% with an average of 100.1%. For RN, $D_{z^*}^F$ change from 100% to 106.38% with an average of 102.3%. For EN, $D_{z^*}^F$ range from 100% to 107.9% with an average of 101.97%. Note that the largest $D_{z^*}^F$ is 107.9% while the largest D_{z^*} is 146.19%. Notice that $D_{z^*}^F$ is 101.87% for the problem (Pr. Id. 31 on EN) with the worst D_{z^*} value of 146.19%. The worst $D_{z^*}^F$ value of 107.9% is obtained for the problem (Pr. Id. 8 on EN) with D_{z^*} value of 117.13%.

The results show that $Z_{\text{MPNIM}}^* \geq Z_{\text{MPNIM-F}}^* \geq Z_{\text{MTNIP-E}}^*$ in accordance with Proposition 3. Moreover, $D_{z^*}^F$ is significantly smaller than D_{z^*} implying that the solution provided by MPNIM may be an adequate approximation to the solution to MTNIP-E in terms of post-interdiction flow capacity. This combined with the fact that MPNIM is incomparably easier to solve shows that MPNIM can be used instead of MTNIP-E especially when there are time constraints.

5. Conclusion

This paper defines and studies MTNIP in which a network user attempts to maximize flow in a network among $k \geq 3$ pre-specified node groups while an interdictor uses limited resources to interdict network arcs to minimize this maximum flow. The paper proposes an exact (MTNIP-E) and an approximating model (MPNIM) to solve this NP-hard problem and presents computational results carried out on different types of networks to compare both models. MTNIP-E is obtained by formulating MTNIP as bi-level min-max program and then converting it into a mixed integer program where the flow is explicitly minimized. MPNIM is binary-integer program that does not minimize the flow directly. It partitions the node set into disjoint subsets such that each node group is in a different subset and minimizes the sum of

the arc capacities crossing between different subsets. Computational results show that MPNIM can solve all instances in a few seconds while MTNIP-E cannot solve about one third of the problems in 24 hour. The optimal objective function values of both models are equal to each other for some problems while they differ from each other as much as 46.2% in the worst case. However, when the post-interdiction flow capacity incurred by the solution of MPNIM is computed and compared to the objective value of MTNIP-E, the largest difference is only 7.90%. This result implies that MPNIM may be a very good approximation to MTNIP-E.

Further research may be on devising methods to improve the solution times of MTNIP-E, e.g., decomposition techniques outlined in Israeli and Wood (2002) can be tried and integer-programming cuts can be developed, improving MPNIM to better approximate MTNIP-E, and extending the models to allow stochastic interdictions.

Acknowledgements

The authors are grateful to two anonymous referees for providing constructive feedback that has helped improve in major ways the presentation of the material in the paper.

References

- Ahuja, R.K., Magnanti, T.L., Orlin, J.B., 1993. *Network Flows*. Prentice Hall, New Jersey.
- Alevras, D., Grötschel, M., Jonas, P., Paul, U., Wessaly, R., 1998. Survivable mobile phone network architectures: Models and solution methods. *IEEE Communications Magazine* 36, 88–93.
- Assimakopoulos, N., 1987. A network interdiction model for hospital infection control. *Computers in Biology and Medicine* 17 (6), 413–422.
- Anandalingam, G., Apprey, V., 1991. Multi-level programming and conflict resolution. *European Journal of Operational Research* 51 (2), 233–247.
- Brown, G., Carlyle, M., Diehl, D., Kline, J., Wood, R.K., 2005. A two-sided optimization for theater-ballistic missile defense. *Operations Research* 53 (5), 745–763.
- Brown, G., Carlyle, M., Salmeron, J., Wood, R.K., 2006. Defending critical infrastructure. *Interfaces* 36 (6), 530–544.
- Church, R.L., Scaparra, M.P., Middleton, R.S., 2004. Identifying critical infrastructure: The median and covering facility interdiction problems. *Annals of the Association of American Geographers* 94, 491–502.
- Cormican, K.J., Morton, D.P., Wood, R.K., 1998. Stochastic network interdiction. *Operations Research* 46, 184–197.
- Costa, M., Letocart, L., Roupin, F., 2005. Minimal multicut and maximal integer multiflow: A survey. *European Journal of Operational Research* 162, 55–69.
- Dahlhaus, E., Johnson, D.S., Papadimitriou, C.H., Seymour, P.D., Yannakakis, M., 1994. The complexity of multiway cuts. *SIAM Journal of Computers* 23, 864–894.
- Dempe, S., 2002. *Foundations of Bilevel Programming*. Kluwer Academic Publishers, Dordrecht.
- Desai, J., Sen, S., 2010. A global optimization algorithm for reliable network design. *European Journal of Operational Research* 200 (1), 1–8.
- Ford Jr., L.R., Fulkerson, D.R., 1956. Maximal flow through a network. *Canadian Journal of Mathematics*.
- Fulkerson, D.R., Harding, G.C., 1977. Maximizing the minimum source-sink path subject to a budget constraint. *Mathematical Programming* 13, 116–118.
- Garg, N., Vazirani, V.V., Yannakakis, M., 1996. Approximate max-flow min-(multi)cut theorems and their applications. *SIAM Journal of Computers* 25 (2), 235–251.
- Ghare, P.M., Montgomery, D.C., Turner, W.C., 1971. Optimal interdiction policy for a flow network. *Naval Research Logistics Quarterly* 18, 37–45.
- Golden, B., 1978. A problem in network interdiction. *Naval Research Logistics Quarterly* (25), 711–713.
- Helmbold, R.L., 1971. A counter capacity network interdiction model. Report R-611-PR, March 1971. RAND Corporation, Santa Monica, California.
- ILOG S.A. ILOG/CPLEX 9.0 Reference Manual, 2003.
- Israeli, E., 1999. System interdiction and defense, Doctoral dissertation, March 1999, Naval Postgraduate School, Monterey, California.
- Israeli, E., Wood, R.K., 2002. Shortest path network interdiction. *Networks* 40, 97–111.
- Lim, C., Smith, J.C., 2007. Algorithms for discrete and continuous multicommodity flow network interdiction problems. *IIE Transactions* 39 (1), 15–26.
- Lubore, S.H., Ratliff, H.D., Sicilia, G.T., 1971. Determining the most vital link in a flow network. *Naval Research Logistics Quarterly* 17, 261–268.
- McMasters, A.W., Mustin, T.M., 1970. Optimal interdiction of a supply network. *Naval Research Logistics Quarterly* 17, 261–268.
- Myung, Y.S., Kim, H.J., Tcha, D.W., 1999. Design of communication networks with survivability constraints. *Management Science* 45, 238–252.
- Ouveysi, I., Wirth, A., 1999. On design of a survivable network architecture for dynamic routing: Optimal solution strategy and efficient heuristic. *European Journal of Operational Research* 117, 30–44.
- Salmeron, J., Wood, R.K., Baldick, R., 2004. Analysis of electric grid security under terrorist threat. *IEEE Transactions on Power Systems* 19, 905–912.
- Scaparra, M.P., Church, R.L., 2008. A bilevel mixed integer program for critical infrastructure protection planning. *Computers and Operations Research* 35, 1905–1923.
- Siman, M., Cruz, J.B., 1973. On the Stackelberg strategy in nonzero-sum games. *Journal of Optimization Theory and Applications* 11, 533–555.
- Smith, J.C., Lim, C., Sudarsho, F., 2007. Survivable network design under optimal and heuristic interdiction scenarios. *Journal of Global Optimization* 38, 181–199.
- Washburn, A., Wood, R.K., 1994. Two-person zero-sum games for network interdiction. *Operations Research* 42, 243–251.
- Whiteman, P.S., 1999. Improving single strike effectiveness for network interdiction. *Military Operations Research* 4, 15–30.
- Wollmer, R.D., 1964. Removing arcs from a network. *Operations Research* 12, 807–1076.
- Wollmer, R.D., 1970a. Algorithm for targeting strikes in a lines-of-communication network. *Operations Research* 18, 497–515.
- Wollmer, R.D., 1970b. Interception in a network. *Naval Research Logistics Quarterly* 17, 207–216.
- Wood, R.K., 1993. Deterministic network interdiction. *Mathematical and Computer Modeling* 17, 1–18.